

TECHNICAL GUIDE

Accesswood



The innovative wooden walkway

TABLE OF CONTENTS

Product definition	02
Technical specifications	02
Conditions of use and installation	03
Warranty	06
References	06

PRODUCT DEFINITION

Accesswood is a 100% autoclave (class 4) pinewood walkway of French origin, assembled in our workshops. Its modern design can be used to create temporary access while respecting the landscape.

TECHNICAL SPECIFICATIONS

DIMENSIONS / TECHNICAL INFORMATION:

Available width	Weight per m ²	Length	Colour	Utilisation
0,99 m 1,49 m	12 kg	Custom-made	Brown wood	Sand Grass Gravel

DIMENSIONS WOODEN BLADE:

Length: 990 mm - 1490 mm

Width: 95 mm

Thickness: 21 mm

DIMENSIONS OF A SECTION:

Length: 2 m

Width: 990 mm - 1490 mm

Blade spacing: 15 mm

18 slats per section: 1st slat heat-marked with Accessrec logo

- **Width 0,99 m:** 2 fixing points for slats to strap
- **Width 1,49 m:** 3 fixing points for slats to strap

TO LINK OUR SECTIONS

- **On sand:** Exotic wood wedges and screws supplied for connecting sections
- **On grass:** **twisted U-fixing** supplied for connecting sections

Included in one section:

- Wood: class 4 autoclaved pine - PEFC wood (sustainably managed forests)
- A4 stainless steel screws (for food use and resistant to acidity and salinity)
- 100% polyester webbing
- twisted U-fixing (4/section)

MAIN ASSETS

- Easy slat replacement in just a few minutes
- Easily modulated to suit your needs
- UV and marine environment resistant
- Modern and aesthetic
- Wood from sustainably managed forests
- Made in France - Hand assembled in Lorrain
- Custom-made to suit your projects



Blades connected by rot-proof polyester straps

CONDITIONS OF USE AND INSTALLATION

Accesswood is an **innovative grating** made from **interchangeable 100% autoclave class 4 pine slats** that can be used to create temporary access while **respecting the landscape**.

It complies with PMR accessibility criteria and can be used to create access for pedestrians, people with reduced mobility, families with baby carriages, etc.

Grating is also an ideal solution **for crossing dunes**.

Our innovative grating complies with the Loi Littoral (French coastal law), as it is **removable** and can be stored at the end of the summer season.

Made up of ready-to-install modules, this product meets the access needs of public authorities and beach concessionaires.

REQUIRED MATERIAL

- **On sand:** Screwdriver with Torx TX25 bit
- **On grass:** Hammer/chisel

INSTALLATION ON SAND, GRAVEL/PEBBLES:

STEP 1: Levelling the ground

On sand, gravel or pebbles, simply start by levelling the ground.

STEP 2: Installing the path

Lay the Accesswood modules one behind the other to create your path. The maximum spacing between sections should be 2cm.

STEP 3: Connecting Accesswood modules

To connect two Accesswood modules, we supply wooden wedges and screws to join two slats in a section. install the wedges and, screw them into place (2 wedges and 4 screws are supplied with each section.

INSTALLATION ON GRASS:

STEP 1: Unroll the section

On an earthen surface, we recommend placing a small layer of gravel under the grating to level the ground and ensure drainage. The use of gratings on uneven surfaces is not recommended.

IMPORTANT :

The maximum spacing between sections must be 2 cm to comply with PRM standards.



STEP 2: twisted U-fixing installation

Position the twisted U-fixing on the outer straps between the first and second blades. Hammer in the twisted U-fixing, finishing with a chisel if necessary.



IMPORTANT :

Remember to tension the sections during installation, and then attach the other twisted U-fixing.

UNINSTALLATION :

- **STEP 1: Remove twisted U-fixing**

Take the first and third blades and gently lift them so that the twisted U-fixing can be easily lifted from the ground.

- **STEP 2: Storage**

Fold the grating in half and store in a dry place.

OUR RECOMMENDATIONS:

Tighten and align the sections before attaching the 4 twisted U-fixing.

Leave a maximum spacing of 2 cm between sections.

For permanent use, it is preferable to use Accesswood with joists, which will allow the wood to :

- Breathe better
- Avoid humidity in winter
- Greater durability

Easy slat replacement:

Accesswood is an innovative product, because if a slat is damaged, it can easily be replaced individually. Simply lift the track and unscrew the batten from the strap to replace it.

Equipment required: Screwdriver with 10 mm diameter socket.

Cleaning: Accesswood can be quickly cleaned with a broom, blower or pressurized water jet

WARRANTY



Accessrec Europe offers a two (2) year warranty from the date of purchase. This warranty covers manufacturing defects only. Alterations due to normal use are not considered manufacturing defects. Damage caused by vandalism or the passage of vehicles (other than those intended by normal use of the product) is not covered by the warranty.

The warranty does not apply to:

- normal wear and tear
- improper use, maintenance or storage of the solution.
- accidents or natural disasters
- modifications made to the solution without the written consent of Accessrec Europe.
- repairs made without the written consent of Accessrec Europe.
- labor or shipping costs that may be necessary if repairs are contemplated.

If you are not satisfied with the conditions or repairs, please contact Accessrec Europe directly. Products may not be returned without the consent of Accessrec Europe. The two (2) year warranty is only applicable to the original purchaser.

REFERENCES

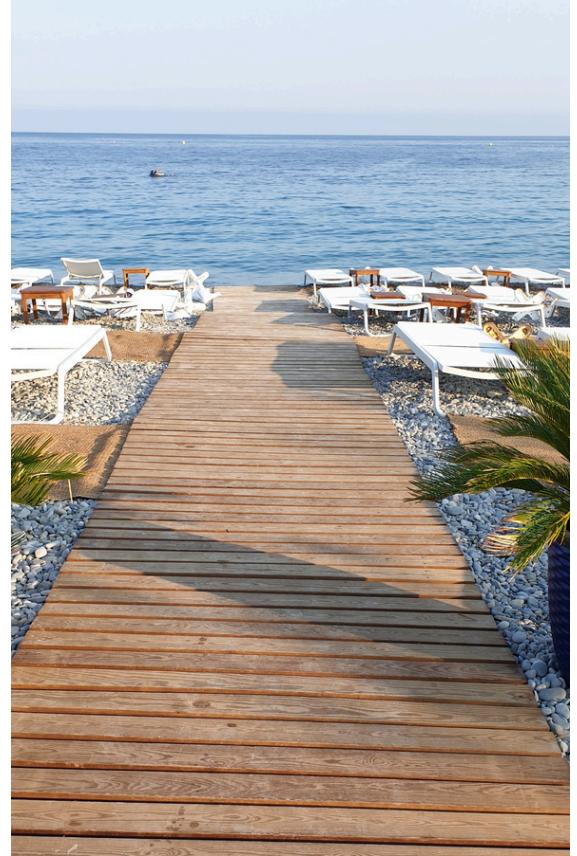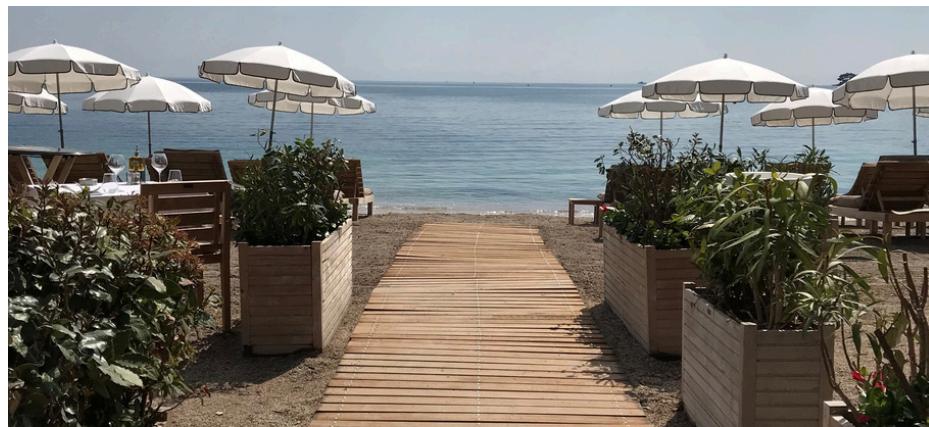

Scan me to discover our full range of walkways and access mats