


This user notice refers to Marguerite, the beach cabin.
Read carefully the following instructions and always follow the safety rules.

INSTRUCTIONS FOR INSTALLATION AND USE

Step 1: Floor levelling. The booth must be placed on a rigid base (minimum 2 cm thick wooden planks or concrete).

Step 2: Position the wall with the door (wall A).



Step 3: Insert the right and left angles, taking care not to swap them. Connect the left wall (wall B) to wall A and insert the joint from top to bottom. Do the same for the wall on the right side (wall C) and the back wall (wall D).

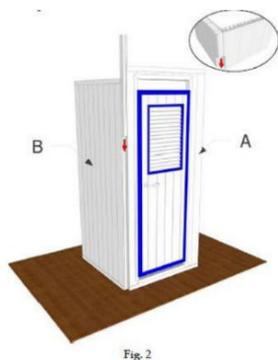


Fig. 2

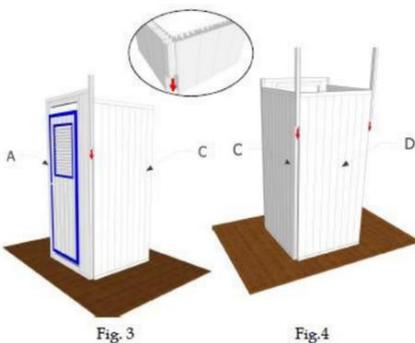


Fig. 3

Fig. 4

The left and right walls are identical and therefore interchangeable. Once the walls are assembled, the handle must be inserted into the door.

Follow the instructions included with the door.

Step 4: The brackets must be placed against the wall.

Step 5: Position the seat side stands. The cabin walls hold the bench stands in place. Then place the bench top on the stands.

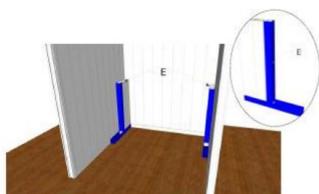


Fig. 5




Fig. 6




Fig. 7

Step 6: Pegs can be fixed to the left or right wall. Drill two holes on the chosen wall and fasten two bolts ($\varnothing 6 \times 70$ stainless steel).

Step 7: The mirror is supplied with a hook, place it at the desired height.

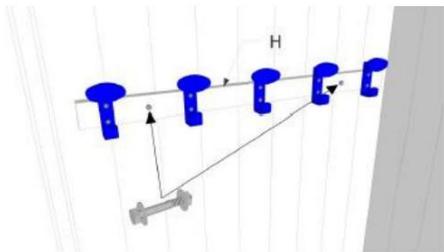


Fig. 8


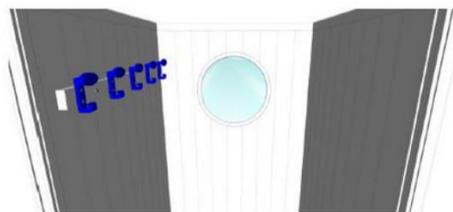



Fig. 9

Step 8: The roof consists of a single panel with 2 fixing bars. Place the roof on the cabin, ensuring that the L profiles remain inside the 4 walls.


Flat roof



Pointed roof




Panneau toit long




The part of the roof that protrudes furthest from the L-section must face forwards.

Step 9: Once the roof is in place, check that the door opens correctly. If there are any imperfections, the door opening can be adjusted using small wedges on the sides of the door. At this stage, you can fix the roof to the structure using the bolts.




The cabin can be anchored to the ground using brackets.


The profiles are reinforced with aluminium or wood to strengthen the hinge.




Aluminium reinforced profile

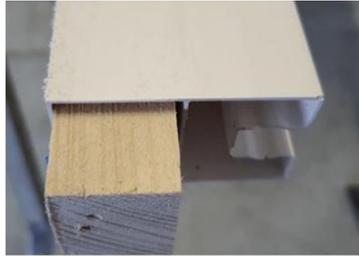

Wood reinforced profile


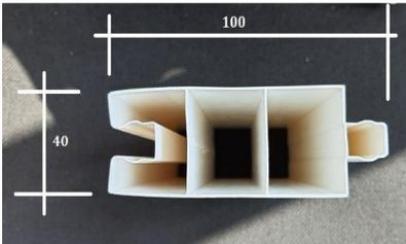


Profile used for the cabin walls

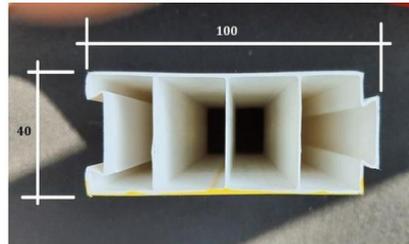

Profile used for the roof

AVAILABLE COLORS

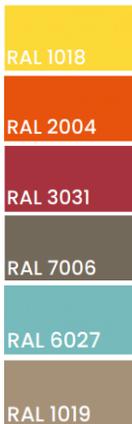

The following colours are available upon request. Customise your cabin as you wish.

WARRANTY

DESCHAMPS offers a five-year (5) warranty from the date of purchase. This warranty only covers manufacturing defects. Alterations due to normal use are not considered to be manufacturing defects. Damage caused by vandalism or the passage of vehicles (other than normal use of the product) is not covered by the warranty.

The warranty does not apply to :

- normal wear and tear of the solutions
- improper use, maintenance or storage of the solution
- accident or natural disaster
- modifications made to the solution without the written consent of DESCHAMPS
- repairs made without the written consent of DESCHAMPS
- labour or shipping costs that may be required if repairs are considered

If you are not satisfied with the conditions or repairs made, please contact DESCHAMPS directly. Products cannot be returned without the consent of DESCHAMPS' company. The five-year (5) warranty is only applicable to the original purchaser.

REFERENCES



ETS A.DESCHAMPS ET FILS
Usine de Bourisson
16400 La Couronne – FRANCE
+33 (0) 545 677 030

Property of ETS A.DESCHAMPS ET FILS and
DESCHAMPS MATS SYSTEMS INC. Mobi-mat®. All
rights reserved. Non-contractual pictures.
Products and specifications can be changed
without prior notice.

DESCHAMPS MATS SYSTEMS
218 Little Falls Road, Unit 12
Cedar Grove NJ 07009 – USA
+1 973 928 3040
GSA contract#47QSWA23D004U