

This user notice refers to Accesswood, the wooden walkway.  
Read carefully the following instructions and always follow the safety rules.

### INSTALLATION

#### INSTALLATION ON SAND – required equipments:

A screwdriver with a Torx TX25 bit. Two people can easily install a 100-linear-meter section of grating in 1 hour.

**Step 1: On sand, gravel or pebbles, simply start by levelling the ground.**

**Step 2: Installing the path.** Lay the Accesswood modules one behind the other to create your path. The maximum spacing between sections should be 2cm.

**Step 3: Connecting Accesswood modules.**

To connect two Accesswood modules, we supply wooden wedges and screws to join two slats in a section. Install the wedges and, screw them into place (2 wedges and 4 screws are supplied with each section).

#### INSTALLATION ON GRASS – required and supplied equipment:

A hammer and a chisel are required. Clamps are supplied (4 per section).

**Step 1: Unroll the section**

On an earthen surface, we recommend placing a small layer of gravel under the grating to level the ground and ensure drainage. The use of gratings on uneven surfaces is not recommended. **The maximum spacing between sections must be 2 cm to comply with PRM standards.**



**Step 2: twisted U-fixing installation**

Position the twisted U-fixing on the outer straps between the first and second blades. Hammer in the twisted U-fixing, finishing with a chisel if necessary. **Remember to tension the sections during installation, and then attach the other twisted U-fixing.**



### UNINSTALLATION

**Step 1: Remove twisted U-fixing**

Take the first and third blades and gently lift them so that the twisted U-fixing can be easily lifted from the ground.

**Step 2: Storage.** Fold the grating in half and store in a dry place.

## OUR RECOMMENDATIONS:

- Properly tension and align the sections before fastening the 4 clamps
- Leave a maximum spacing of 2 cm between the different sections
- For permanent use, it is recommended to choose Accesswood with joists, which allows the wood to breathe better, prevents moisture buildup in winter, and ensures greater durability.

## MAINTENANCE

**Easy slat replacement:** Accesswood is an innovative product because if a slat is damaged, it can be easily replaced individually. Simply lift the walkway and unscrew the slat from the strap to replace it. Slat replacement is very simple, which significantly extends the service life of the Accesswood grating.

Required equipment: Screwdriver with a 10 mm socket.

**Cleaning:** Accesswood can be quickly cleaned using a broom, a blower, or a high-pressure water jet.

**Uninstallation:** At the end of the summer season, you can quickly dismantle your AccessWood grating. Simply unscrew the sections and roll them up for storage until the next season. Required equipment: Screwdriver with a Torx TX25 bit.

## WARRANTY


**DESCHAMPS offers a two (2) year warranty from the date of purchase. This warranty covers manufacturing defects only. Alterations due to normal use are not considered manufacturing defects. Damage caused by vandalism or the passage of vehicles (other than those intended by normal use of the product) is not covered by the warranty.**

The warranty does not apply to:

- normal wear and tear or improper use, maintenance or storage of the solution.
- accidents or natural disasters.
- modifications made to the solution without the written consent of DESCHAMPS.
- repairs made without the written consent of DESCHAMPS.
- labor or shipping costs that may be necessary if repairs are contemplated.

If you are not satisfied with the conditions or repairs, please contact DESCHAMPS directly. Products may not be returned without the consent of DESCHAMPS. The two (2) year warranty is only applicable to the original purchaser.

## REFERENCES

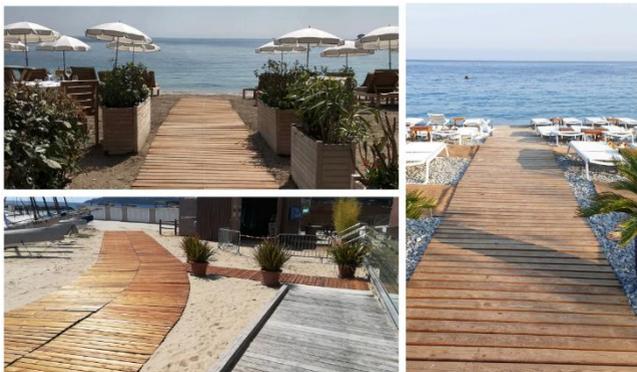

ETS A.DESCHAMPS ET FILS  
Usine de Bourissson  
16400 La Couronne – FRANCE  
+33 (0) 545 677 030

Property of ETS A.DESCHAMPS ET FILS and  
DESCHAMPS MATS SYSTEMS INC. Mobi-mat®. All  
rights reserved. Non-contractual pictures.  
Products and specifications can be changed  
without prior notice.

DESCHAMPS MATS SYSTEMS  
218 Little Falls Road, Unit 12  
Cedar Grove NJ 07009 – USA  
+1 973 928 3040  
GSA contract#47QSWA23D004U