AQUACCESS MOBILE

Assembly and operating instructions manual

This user notice refers to Aquaccess Mobile, the mobile lift for swimming pools.
Read carefully the following instructions and always follow the safety rules.

ACCESSORIES OVERVIEW

With the purchase of each Aquaccess Mobile, you will find the following items in your package.

Control unit (with battery) and battery charger

230 V Power outlet



Remote control

Safety Seat Belt

Protective cover 158x158 cm

Front wheel

Rear wheel



Break set

All accessories are available as spare parts. Please contact us for any additional information or if you wish to purchase any of these parts.

The blue protective cover is included in your package for the “off-season” period. It will help protect your Aquaccess Mobile from moisture, cold, or external elements that could damage your product.

FEATURES

- **Security**: emergency button behind the front wheels, waterproof remote control, possibility to operate from the power supply unit (in case of malfunction), brakes on the rear wheels for added stability
- **Practical**: detachable and rechargeable battery, charge indicator on both the battery and the charger
- **Ideal for wet environments**: Suitable wheels, water-repellent seat, parts that enter the water are made of stainless steel
- **Comfortable**: Adjustable seat mechanism allowing adjustment of distances in and above the water according to user needs.

Aquaccess Mobile is suitable for both adults and children!

For assistance or information, please contact: sales@deschamps.eu

Tools not included

2 wrenches size 13 mm

2 wrenches size 17 mm

Estimated assembly time: 1 hour 30 minutes for 2 people.

Step 1: Identify all components required for assembling your Aquaccess Mobile using the list above.

Step 2: Position the mast (part 1) on the main structure and secure it using screws (part 13), washers (part 11), and nuts (part 10).

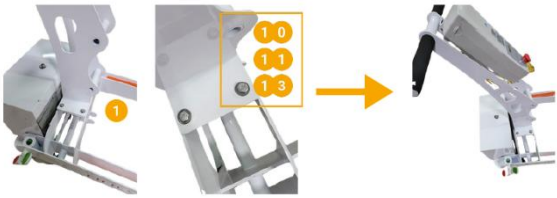

Step 3: Insert the spacers (part 16) on each side of the lower part of the mast (part 1).

Step 4: Using a screw (part 14), washer (part 11), and nut (part 9), attach arm 2 (part 6) to the mast.

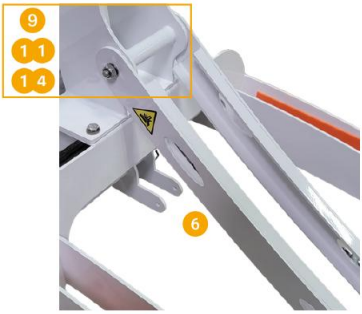

Step 5: Repeat steps 4 and 5 with arm 1 (part 5) on the upper level.

Step 6: Insert the spacers (part 16) into the seat chassis (part 2) as shown in the photo.

Step 7: Attach arms 1 and 2 to the seat chassis (part 2) using a screw (part 14), washer (part 11), and nut (part 9).

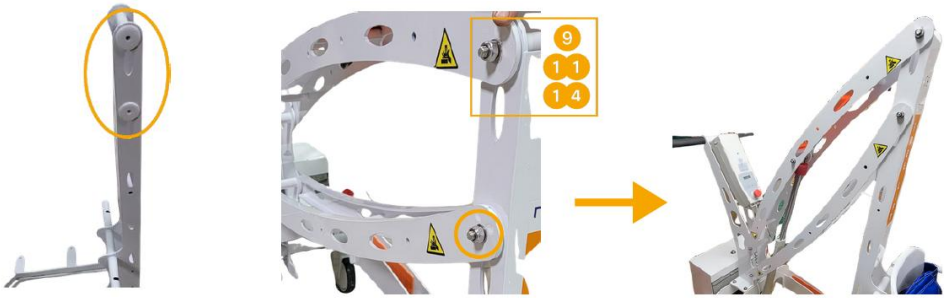

Step 8: Secure the hydraulic actuator to the main structure using screw (part 15) and nut (part 10).

Step 9: Attach the upper part of the actuator to arm 1 (part 5) using screw (part 14), washer (part 11), and nut (part 9).

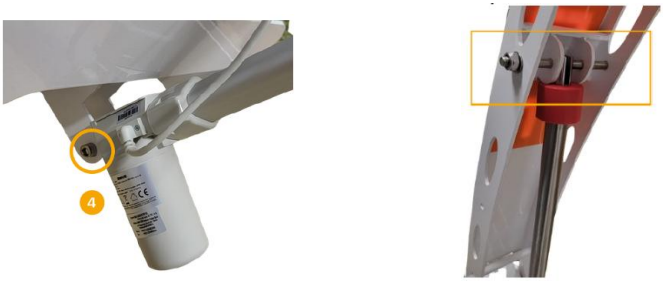

Step 10: Insert the armrests (part 8) into the sleeves and tighten them with the designated washer and screw.

Step 11: Position the seat (part 7) facing the holes on the footrest wings (part 3).

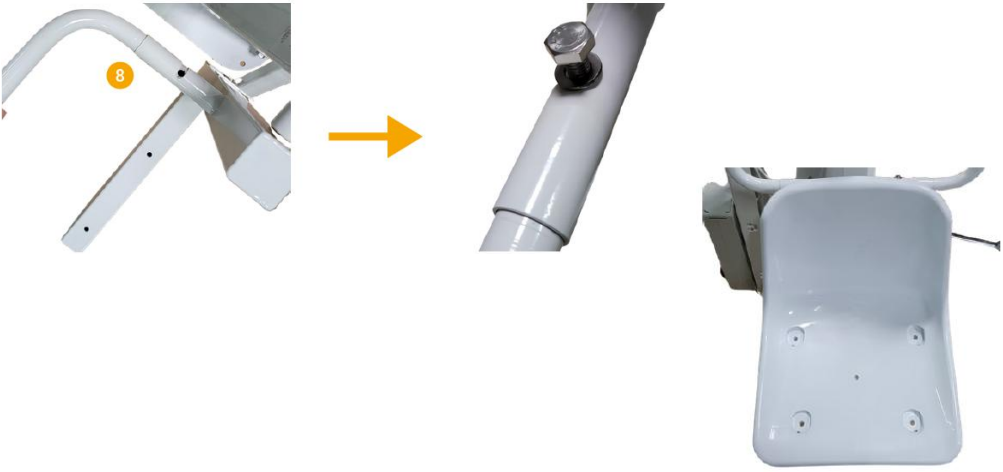

Step 12: Insert a washer (part 11) and a screw (part 13). Secure with a nut (part 10) and tighten using two 17 mm wrenches.

Step 13: Install the seat covers (part 12).

Step 14: Secure the power supply unit to the structure as shown in the image.

Step 15: Connect the supplied cables. (Ensure cables are fully inserted. Poor contact may cause malfunction.)

FINAL INSTALLATION

WHERE TO INSTALL YOUR AQUACCESS MOBILE?

- Thermal spa facilities
- Hydrotherapy pools for people with reduced mobility
- Sports federations
- Health tourism hotels for disabled and elderly people
- Public swimming pools
- Private swimming pools
- Elderly care centers
- Resorts
- Outdoor hotel pools
- Clinical rehabilitation hotel centers

CONDITIONS OF USE

INSTALLATION AREA REQUIREMENTS:

- Aquaccess Mobile can be used in outdoor or indoor pools.
- A clear obstacle-free space is required around the unit.
- The distance between the wheels and the pool must be 3 to 5 cm.
- The seat must enter the water by at least 45.5 cm.
- Pay attention to the footrest distance in pools with a depth not exceeding 140 cm.

SAFETY RULES:

- Follow installation and operating instructions carefully.
- Do not allow children to play with or around the lift.
- Do not sit on the lift when there is no water in the pool.
- For safety reasons, do not use it in situations where no one can assist you in case of emergency.
- Do not use without fastening the safety belt.
- Do not use without activating the brakes.
- Press the emergency stop button if necessary.

USING THE AQUACCESS MOBILE TO ENTER AND EXIT THE POOL:

- **Step 1**: Sit on the seat and fasten the safety belt.
- **Step 2**: Place your feet on the footrest.
- **Step 3**: Ensure there are no obstacles or hazards in the lift area.
- **Step 4**: Hold the remote control and press the button until your waist is immersed in the pool water or until you are raised back to poolside. This action can be performed by an assistant or yourself.
- **Step 5**: Remove your belt once the lift has stopped**.**

It is strongly advised not to connect the battery directly to a 230V power outlet, as this may damage it.

Always use the supplied charging unit.

During winter, store batteries away from very low temperatures to prevent damage.

MAINTENANCE

- Clean the lift using clean water only; do not use pool water.
- Wipe with a clean, soft, non-abrasive cloth.
- Do not expose electronic components to direct water pressure during cleaning.
- Do not store the lift where it may suffer impact or come into contact with chemicals.

PERIODIC MAINTENANCE PROGRAM FOR AQUACCESS MOBILE:

MAINTENANCE INSTRUCTIONS	DAILY	WEEKLY	MONTHLY
Rinse with clean water and wipe down. Do not use high-pressure water directly on the elevator's electronic components.	✓		
Charge the battery.		✓	
To ensure proper operation, run the elevator once through its full cycle without anyone on it (before each use).	✓		
Check that the elevator is not damaged or corroded, and that all components are secure and present.	✓		
Inspect all connection points and ensure they are not damaged or corroded.		✓	
Check the warning labels and replace them if they are worn.			✓
Check that the armrest and footrest screws are properly tightened.		✓	

TROUBLESHOOTING

If the pool lift stops working:

- **Solution 1:** The control unit cable may be disconnected. Ensure it is properly connected.
- **Solution 2:** Connections between the control unit and actuator may be loose. Ensure they are fully connected.
- **Solution 3:** The battery may be discharged or worn out. Recharge fully using the charger.

If the issue persists, do not attempt further action. Please contact our company for technical support:
Tel: +33 3 83 71 67 11

STANDARDS

- Waterproof manual control (IP66 standard)
- CE Certificate
- ISO 9001 and ISO 13485 Certificates

WARRANTY

DESCHAMPS offers a two (2)-year warranty starting at the date of your Purchase Order. This warranty only covers manufacturing defects of the product. Alterations related to normal use are not considered as manufacturing defects. Damages caused by vandalism are not covered by the warranty.

The warranty does not cover:

- The normal wear and tear of Aquaccess Mobile
- Improper care, operation, maintenance and storage of Aquaccess Mobile
- An accident or natural disaster
- Modifications that have been made to Aquaccess Mobile without the written consent of DESCHAMPS
- Repairs that have been made without the written consent of DESCHAMPS
- Maintenance and transport costs that can be necessary if reparations are required.

This warranty does not cover any labor or shipping charges that may be required if the Aquaccess Mobile frame needs to be replaced or repaired. If you are not satisfied with the conditions provided or the repairs that have been made, please DESCHAMPS company. Products cannot be returned without the consent of DESCHAMPS. The two (2)-year warranty is only applicable to the original purchaser.

REFERENCES

ETS A.DESCHAMPS ET FILS
Usine de Bourisson
16400 La Couronne – FRANCE
+33 (0) 545 677 030

Property of ETS A.DESCHAMPS ET FILS and DESCHAMPS MATS SYSTEMS INC. Mobi-mat®. All rights reserved. Non-contractual pictures. Products and specifications can be changed without prior notice.

DESCHAMPS MATS SYSTEMS
218 Little Falls Road, Unit 12
Cedar Grove NJ 07009 – USA
+1 973 928 3040
GSA contract#47QSWA23D004U